


NPEXA-H211

4 ~ 20 mA



PC

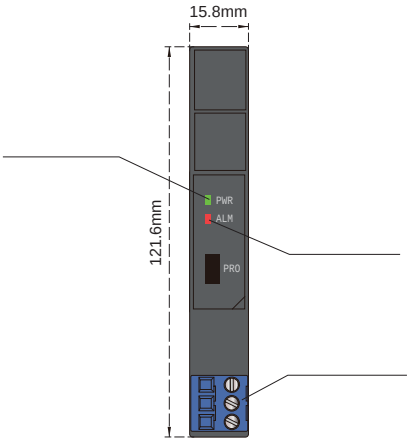

18V DC 32V DC
1.5W 24V

≤ 20Ω /
4 20mA
R_L ≤ 500Ω
0.01%F.S./
≤ 1s
IEC 61326-3-1
≥ 2500V AC
≥ 500V AC
≥ 100MΩ / /
-20 +60
-40 +80

15.8mm× 121.6mm× 104.8mm
4mA~20mA NE43
0 1 2 II A II B
II C T4 T6

* 8-, 9+; 11-, 12+.



(NEPSI)
[Ex ia Ga] II C
(U_m) 250V
(1 2 3)
U_o=7.3V, I_o=27mA, P_o=50mW
II C Co=12μF Lo=28mH
II B Co=151μF Lo=84mH
II A Co=700μF Lo=224mH



NPEXA-H2

- | | |
|---|--------|
| 1 | 4~20mA |
| 2 | 1~5V |
| 3 | 0~10mA |
| 4 | 0~5V |
| 5 | 0~10V |
| 6 | 0~20mA |